


## TAS240

### 3-Phase Measuring Current Transformers



- Cable aperture : 3 @ 15.5 x 30mm
- Primary current : 60 to 200A
- Secondary terminals M4 Screws
- 25mm hole centres
- Sealable terminal cover included
- Housing Material Self extinguishing Nylon IEC185 classification VO according to UL-94
- Weight : 500g

#### Dimensions

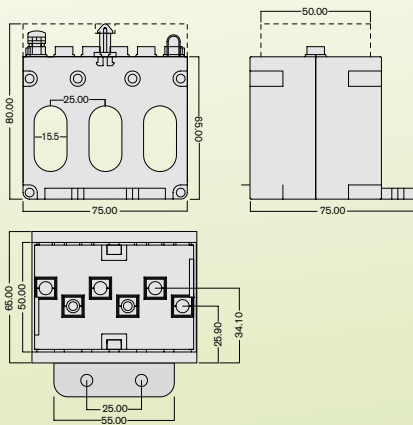

#### Current Transformer Ratios

Primary Current	Burden			Code
	cl. 0.5 VA	cl. 1 VA	cl. 3 VA	
60	-	1.5	2.0	060
100	-	2.0	3.0	100
125	-	2.5	3.0	125
150	1.5	2.5	3.0	150
160	1.5	2.5	3.0	160
200	1.5	2.5	3.0	200

5A Secondary

#### How to Order / Model Reference

eg **TAS240 100 /5A**

Model	TAS240		
Primary Current			
Select code from ratio table above	???		
Secondary Current			
5A			/5A


## TAS242

### 3-Phase Measuring Current Transformers



- Cable aperture : 3 @ 21 x 25mm
- Primary current : 60 to 250A
- Secondary terminals M4 Screws
- 35mm hole centres
- Sealable terminal cover included
- Housing Material Self extinguishing Nylon IEC185 classification VO according to UL-94
- Weight : 550g

#### Dimensions

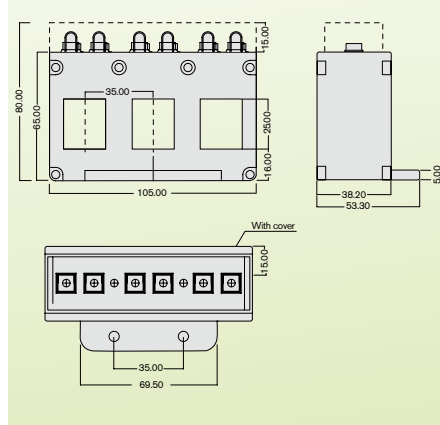

#### Current Transformer Ratios

Primary Current	Burden			Code
	cl. 0.5 VA	cl. 1 VA	cl. 3 VA	
60	-	1.5	2.0	060
100	-	2.0	3.0	100
125	-	2.5	3.0	125
150	1.5	2.5	3.0	150
160	1.5	2.5	3.0	160
200	1.5	2.5	3.0	200
250	1.5	2.5	3.0	250

5A Secondary


#### How to Order / Model Reference

eg **TAS242 125 /5A**

Model	TAS242		
Primary Current			
Select code from ratio table above	???		
Secondary Current			
5A			/5A


## TAS248

### 3-Phase Measuring Current Transformers

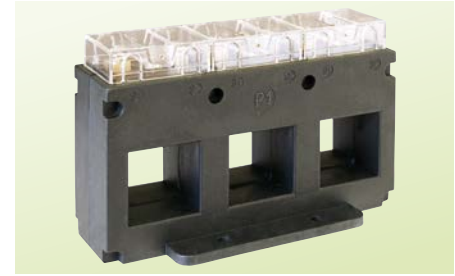

- Cable aperture : 3 @ 31 x 31mm
- Primary current : 250 to 630A
- Secondary terminals M4 Screws
- 45mm hole centres
- Sealable terminal cover included
- Housing Material Self extinguishing Nylon IEC185 classification VO according to UL-94
- Weight : 680g

#### Dimensions

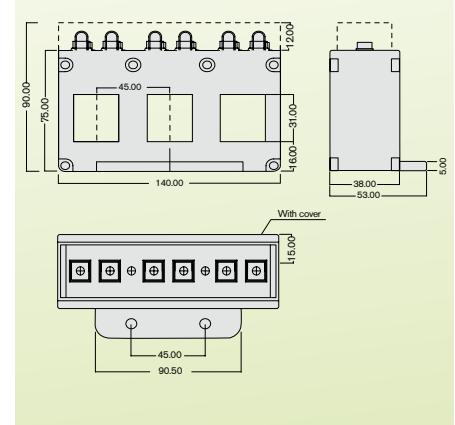

#### Current Transformer Ratios

Primary Current	Burden			Code
	cl. 0.5 VA	cl. 1 VA	cl. 3 VA	
250	1.5	2.5	3.0	250
300	2.5	3.75	4.0	300
400	2.5	3.75	4.0	400
500	2.5	3.75	4.0	500
600	2.5	3.75	4.0	600
630	2.5	3.75	4.0	630

5A Secondary

#### How to Order / Model Reference

eg **TAS248 125 /5A**

Model	TAS248		
Primary Current			
Select code from ratio table above	???		
Secondary Current			
5A			/5A