


MECHANICAL DATA

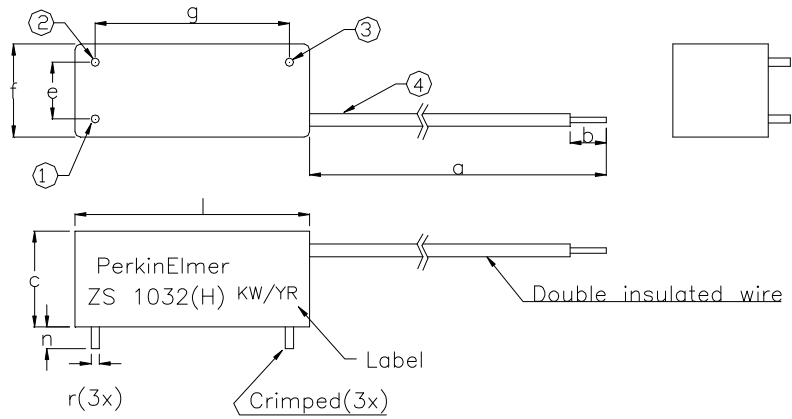

Dimensions (mm)

e : 10.16±0.2	c : 17.5+0.5/-1.0	:
l : 43±0.5	f : 17±0.5	:
d :	n : 3+2/-0	:
r : 1.5+0.25/-0.5	g : 35.56±0.2	:
a : 80±5	:	:
b : 5±2	:	:

Pin no.1 & 2 Primary	Pin no.3 Secondary
Pin no.4 Secondary HV	

Remarks :


Operating temperature -30°C to +80°C
 Storage Temp. : -20°C to +55°C
 All the solder materials with lead free
 RoHS compliance

				Number of sheets 2	Sheet no. 1
				Drawn by Jun.08.06	Sign. Michael Li
				Checked by	
				Type ZS 1032 (H)	
Index	Changes	Date	Sign.		

EXCELITAS
TECHNOLOGIES

47 Ayer Rajah Crescent #06-12
 Singapore 139947
 Tel : (065) 67752022
 Fax : (065) 67782370


OPERATING DATA

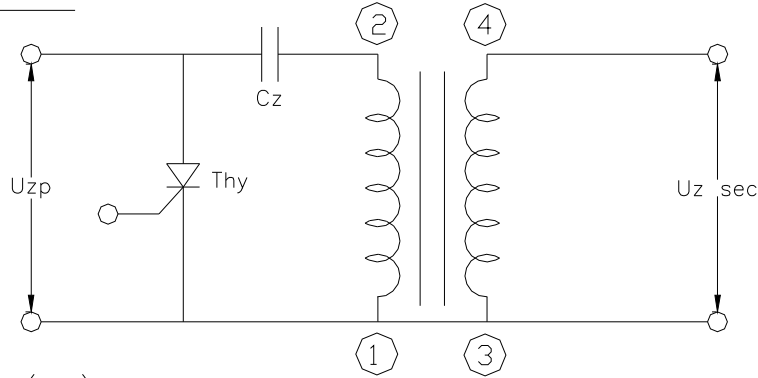

Dimensions (mm)

ITEMS	PRIMARY	SECONDARY
Resistance	42±8 mohm	125±15 ohm
Primary Voltage, Uzp	Uzp = 400V	---
Primary Capacitance, Cz	0.47 uF	---
Polarity of 1st peak	---	1st peak Negative
Secondary Voltage, Uz	---	26±3 kV
Inductance @ 1kHz	11±3 uH	53±7 mH

Typical waveform :

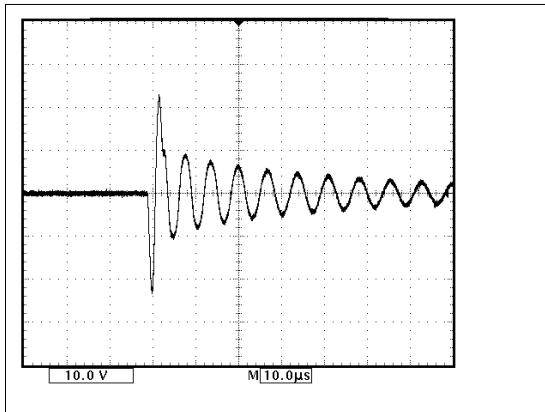

Unloaded high voltage output
10 us/div 10 kV/div

				Number of sheets 2	Sheet no. 2
				Drawn by Jun.08.06	Sign. Michael Li
				Checked by	
				Type ZS 1032 (H)	
Index	Changes	Date	Sign.		

EXCELITAS
TECHNOLOGIES

47 Ayer Rajah Crescent #06-12
Singapore 139947
Tel : (065) 67752022
Fax : (065) 67782370